


"Taking Your Pressure To a Higher Level"

ALL PLASTIC DESIGN

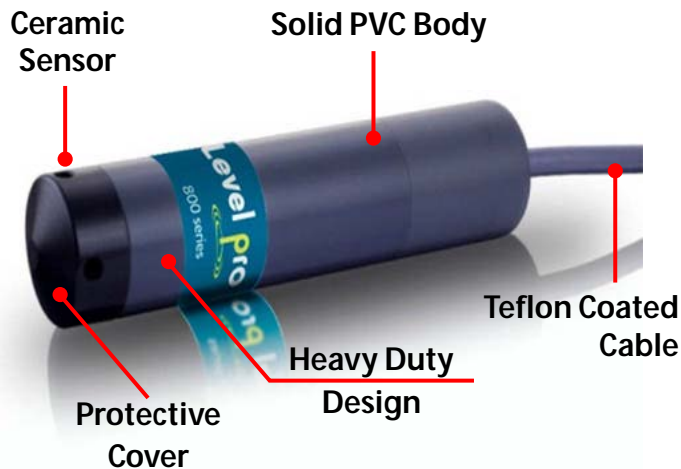

800 Series Heavy Duty Industrial Level Transmitter

PVC Plastic Transmitter for
Aggressive Fluids

PVC Body - Ceramic Sensor
(Corrosion Resistant)

Pressure Measurement

- ▶ from 0-14ft / H₂O up to 54ft / H₂O
5.8 PSI - 23 PSI

Output Signal

- ▶ 2 wire: 4-20 mA

Features

- ▶ Compact Design
- ▶ Low Cost
- ▶ Excellent Long Term Stability
- ▶ High Accuracy
- ▶ Flush Sensor - Non Clogging Design
- ▶ Heavy Duty PVC Cable (3m, 5m, 10m, 15m)
Length - Other Lengths Available
- ▶ Excellent for Foam, Vapor or Condensate
- ▶ Ceramic Sensing Diaphragm
- ▶ Heavy Duty Rugged Design
- ▶ No Moving Parts
- ▶ Automatic Temperature Compensation

The **PVC 800 Series Pressure Transmitter** is designed for Continuous Level Measurement for **Aggressive Liquid Media**.

Applications

Sewage



- Foam - Vapor-Turbulence-Condensate
- Waste Water Treatment
- Leachate Collection
- Waste Sumps or Pits
- Chemical Dosing

Aggressive media



- Leachate Collection
- Pits
- Chemical Tanks

- ▶ **Excellent for All Tanks/Sumps-Large (54") or Small (16")**
- ▶ **The Solution to Tough Applications where Ultrasonics Sensors Simply DO NOT WORK!**
- ▶ **No Lost Signals**

Input Pressure Range

Nominal Pressure Gauge	PSI	5.8	8.7	14.5	23
Level	ft/H ₂ O	13.0	20.0	33.5	54
Overpressure	PSI	2.1	29	29	58
Burst Pressure >	PSI	29	58	58	72

Output Signal/Supply

Standard	2-wire: 4-20mA
----------	----------------

Performance

Accuracy	<± 0.5% Full Scale or Better
Permissible load	$R_{max} = [(V_s - V_{smin}) / 0.02 A] \Omega$
Influence effects	Supply : 0.05% Full Scale/10V Load : 0.05% Full Scale/K Ω
Long term stability	<± 0.1% Full Scal over one year
Response time	<10 msec or better
¹ accuracy according to IEC 60770 - limit point adjustment (non-linearity, hysteresis, repeatability)	

Thermal Effects (Offset and Span)

Thermal Error	<± 0.2% FSO/K in compensated range -25 - 70°C
---------------	--

Permissible Temperatures

Permissible Temperatures	Medium	0 -60°C	32°F -140°F
	Storage	-10 -60°C	

Electrical Protection

Short-circuit Protection	Permanent
Reverse Polarity Protection	No Damage to Sensor
Electromagnetic Compatibility	Emission Immunity according to EN 61326
Short-circuit Protection	Permanent



DC Power Only



Electrical Connection

Cable with sheath material	FEP (Teflon) (0 -200°F)
3 Wire Cable with integrated air tube for atmospheric pressure reference	


Materials (wetted)

Housing	PVC
Seals	FKM/EPDM (FEM - Standard)
Diaphragm	Ceramic Al ₂ O ₃

Miscellaneous

Current Consumption	Max. 25 mA
Weight	approx. 200g (without cable)
Ingress Protection	IP 68
CE-Conformity	EMC Directive: 2004/108/EC

Wiring Diagram

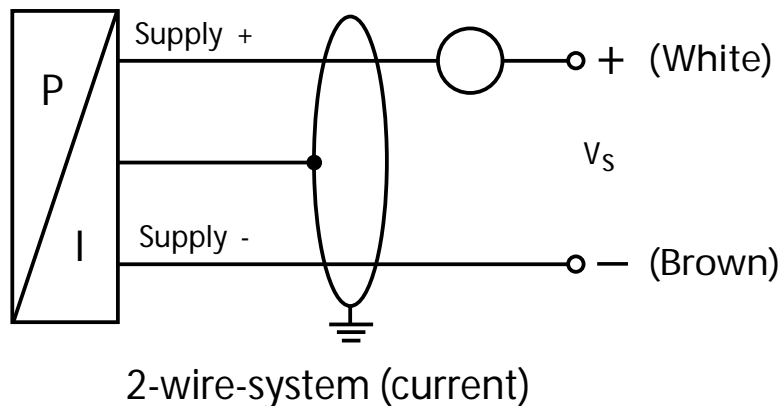

Pin Configuration

Electrical Connection	Cable Colours
	Supply + wh (white)
	Supply - bn (brown)
	Shield (green/yellow)

