

ULTRA 5

Technical Specifications:

Ultra 5 offers the ultimate flexibility in ultrasonic control and measurement. Ultra 5 is user-configurable to measure level or volume, provide advanced pump control or measure open channel flow to BS ISO 1438 and 4359. Including five assignable relays with extra alarm options such as pump efficiency, pump control functions, storm and aeration control and many more!



PHYSICAL: MOUNTING OPTION SPECIFIC

Mounting Option:	Standard Wall Mount:	Fascia Mount:	Rack Mount:	Panel Mount:
Controller Body Dimensions	235 mm x 184 mm x 120 mm (9.25 in x 7.24 in x 4.72 in)	200 mm x 112 mm x 108 mm (7.87 in x 4.4 in x 4.25 in)	10 HP X 160 mm D x 3U 128.5 mm H (6.3 in x 5.06 in)	72 mm W x 144 mm H x 176 mm D (2.83 in x 5.67 in x 6.9 in)
Weight:	1 kg (2.2 lb)	1.3 kg (2.86 lb)	0.8 kg (1.7 lb)	1.4 kg (3 lb)
Enclosure Material/Description:	Polycarbonate, flame resistant to UL91	Stainless steel back, Polycarbonate UL94-V0 front and bezel	Aluminium Frame	ABS
Cable Entry Detail:	10 cable entry knock outs 5x M20, 1 x M16 underside 4 x 18 mm (0.71 in) dia (PG11) at rear	N/A	N/A	N/A
Enclosure Protection:	IP65	IP64	None	IP65 Optional

PHYSICAL: ALL MOUNTING OPTIONS

Transducer Cable Extensions:	2-core screened
Maximum Separation:	Up to 1,000 m (3,280 ft)

ENVIRONMENTAL

Max. And Min. Temperature (Electronics):	-20 °C to +50 °C (-4 °F to +120 °F)
---	-------------------------------------

APPROVALS

CE Approval:	Listed in the Certificate of Conformity within the manual
Flammable Atmosphere Approval:	Safe area: compatible with approved dB transducers

PERFORMANCE

Accuracy/Repeability:	0.25% of the measured range or 6 mm (0.24 in), whichever is greater
Resolution:	0.1% of the measured range or 2 mm (0.08 in), whichever is greater
Min. & Max. Range:	0 m to 40 m (131 ft). Dependent on sensor used. Ability to measure 50 m (164 ft) with dB50 when modified.
Rate Response:	Fully adjustable
Echo Processing:	DATTEM (Digital Adaptive Tracking of Echo Movement)

OUTPUTS

Analog Output:	Isolated (floating) output (to 150 V) of 4-20mA or 0-20mA into 500 Ω (user programmable and adjustable) 0.1% resolution
Digital Output:	Full Duplex RS232
Volt Free Contacts, Number & Rating:	5 form "C" (SPDT) rated at 5 A at 240V AC
Display:	6 digits plus 12 character text, plus bargraph with direction indicators, remote communicator identifier and program/run/test mode indicators

INPUTS


Analog Input (Optional):	Isolated (floating) input (to 150 V) 4-20mA or 0-20mA source, open circuit voltage 33 V, 22 V at 4mA, 14 V at 20mA (user programmable and adjustable) 0.1% resolution
---------------------------------	---

PROGRAMMING


On-Board Programming:	By integral keypad
PC Programming:	Via RS232
Programming Security:	Via passcode (user selectable and adjustable)
Programmed Data Integrity:	Via non-volatile RAM, plus backup
Rack & Panel Remote Programming:	Via optional infra-red communicator (requires 2 x AA alkaline batteries)

SUPPLY

Power Supply:	105 V AC +5% / -10% 50/60Hz, 230 V AC +5% / -10% 50/60Hz, 18-36 V DC, 10W maximum power (typically 6 W)
Fuses:	100mA at 170-240 V AC, 200mA at 85-120 V AC

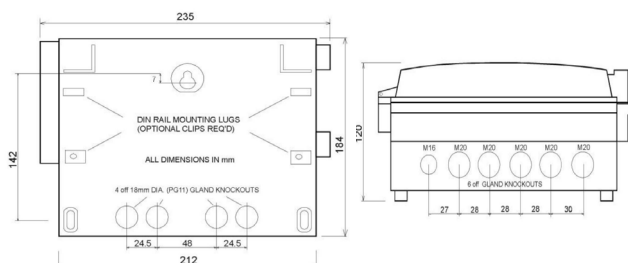

Ultra 5 Wall Mount and Gland Knockouts

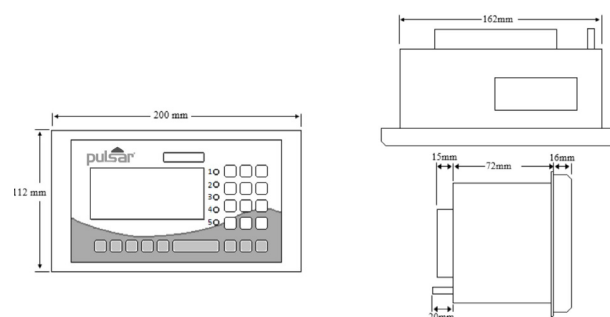

Ultra 5 Fascia Mount Drawings Front, Top and Side



INFO@PULSARMEASUREMENT.COM

Pulsar Measurement is a trading name of Pulsar Process Measurement, Ltd.

Copyright © 2020 Pulsar Measurement
Registered Address: 1 Chamberlain Square CS, Birmingham B3 3AX
Registered No.: 3345604 England & Wales

Delivering the Measure of Possibility

United States
11451 Belcher Road South
Largo, FL 33773
888-473-9546

Canada
16456 Sixsmith Drive
Long Sault, Ont. K0C 1P0
855-300-9151

United Kingdom
Cardinal Building, Enigma
Commercial Centre
Sandy's Road, Malvern WR14 1JJ
+44 (0) 1684 891371

Rev 1.0