

ULTRATWIN

Technical Specifications:

Flexibility is the UltraTWIN two channel ultrasonic system. Each channel is user-configurable to operate independently either as a full function open channel flow monitor, a pump control system, or as a level and volume monitoring unit for liquids or solids, calculating volumes and providing alarms.



PHYSICAL: MOUNTING OPTION SPECIFIC

Mounting Option:	Standard Wall Mount:	Fascia Mount:
Controller Body Dimensions:	235 mm x 184 mm x 120 mm (9.25 in x 7.24 in x 4.72 in)	200 mm x 112 mm x 108 mm (7.87 in x 4.41 in x 4.25 in) Cutout: 165 mm x 105 mm (6.5 in x 4.13 in)
Weight:	Nominal 1 kg (2.2 lb)	Nominal 1 kg (2.2 lb)
Enclosure Material/Description:	Polycarbonate, flame resistant to UL 94-5V (wall), UL94-V0 (fascia)	Polycarbonate, flame resistant to UL 94-5V (wall), UL94-V0 (fascia)
Cable Entry Detail:	3 x M20 glands	
Transducer Cable:	Twin Screened	
Maximum Separation:	1,000 m (3,280 ft)	

ENVIRONMENTAL

IP Rating:	IP65 (Standard), IP64 (Fascia)
Max. & Min. Temperature (Electronics):	-20 °C to +50 °C (-4 °F to +122 °F)
Flammable Atmosphere Approval:	Safe area: compatible with approved dB transducers
CE Approval:	See the CE Declaration of Conformity in the product manual
UL Approval:	UL Listed. UL Listed to Canadian safety standards. Certificate Number: E257330 (wall and fascia mounts only)

PERFORMANCE

Accuracy:	+0.25% of the measured range or 6 mm (0.24 in), whichever is greater
Resolution:	+0.1% of the measured range or 2 mm (0.08 in), whichever is greater
Range:	<ul style="list-style-type: none"> 125 mm to 40 m (0.41 ft to 130 ft), depending on transducer 0 m to 2.425 m (0 ft to 7.95 ft), with dBMACH3 for open channel flow
Echo Processing:	Patented DATEM (Digital Adaptive Tracking of Echo Movement)

OUTPUTS/INPUTS

Analog Output:	2 x Isolated output 4-20mA or 0-20mA into 500 (user programmable and adjustable), 0.1% resolution
Digital Output:	Full duplex RS232 via RJ11 port
Display:	6 digits plus 12 character text, plus bar graph with direction indicators, remote communicator identifier and program/run/test mode indicators
Digital Inputs:	Wall = 4, Fascia = 7, normally open or normally closed, 24 V DC supply

PROGRAMMING

On-board Programming: Standard on wall and fascia mount units with integral keypad


PC Programming: Via RS232 (RJ11 port)

Programming Security: Via password (user selectable and adjustable)


Programmed Data Integrity: Via non-volatile RAM, plus backup

Power Supply: 115 V AC +5%/-10% 50/60 Hz, 230 V AC +5%/-10%, 18-30 V DC

Volt-free Contacts: 6 form C (SPDT) 5 A, 240 V AC

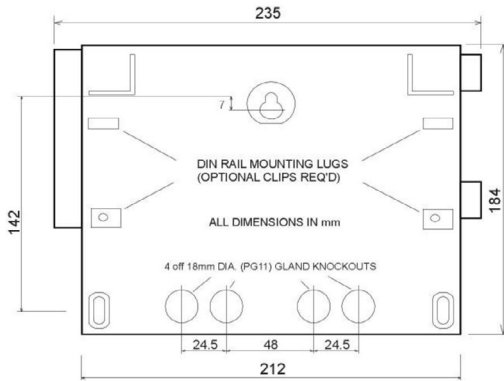

UltraTWIN Drawing Back

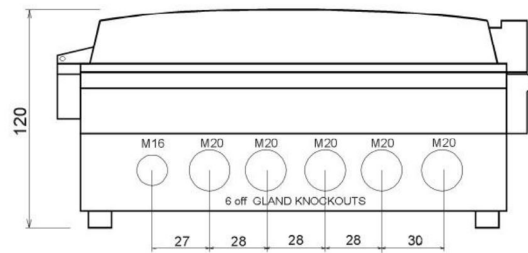

UltraTWIN Drawing Cable Entry

Delivering the Measure of Possibility

Pulsar Measurement offers worldwide professional support for all of our products, and our network of reps and distributors all offer full support and training. Our facilities in Malvern, UK and Largo, USA are home to technical support teams who are always available to answer your call or attend your site when required. Our global presence, with direct offices in the UK, USA, Canada, and Malaysia allow us to create close relationships with our customers and provide service, support, training, and information throughout the lifetime of your product.

By taking a step forward in echo processing technology, Pulsar Measurement addresses applications previously thought to be beyond the scope of ultrasonic measurement. This technology improves signal processing at the transducer head which has made it possible to increase resistance to electrical noise, enabling the transducer to 'zone in' on the true echo.

For more information, please visit our website:

www.pulsarmeasurement.com



INFO@PULSARMEASUREMENT.COM

Pulsar Measurement is a trading name of Pulsar Process Measurement, Ltd.

*Copyright © 2020 Pulsar Measurement
Registered Address: 1 Chamberlain Square CS, Birmingham B3 3AX
Registered No.: 3345604 England & Wales*

United States
11451 Belcher Road South
Largo, FL 33773
888-473-9546

Canada
16456 Sixsmith Drive
Long Sault, Ont. K0C 1P0
855-300-9151

United Kingdom
Cardinal Building, Enigma
Commercial Centre
Sandy's Road, Malvern WR14 1JJ
+44 (0) 1684 891371

Rev 1.0